


Click Tite® + Self-adhesive Engineered Weather Barrier is the ultimate self-adhesive flashing, designed specifically for sealing window/wall connections in residential & commercial construction.

Click Tite® + provides a driving rain & air tight seal, while simultaneously remaining vapour permeable, allowing moisture to expel out of connection details prone to condensation build up.

Specifically developed for Australian conditions Click Tite® + will tolerate extremes in wind, temperature & driving rain

- ❖ Terrific Driving Rain Tightness
- ❖ Prevents unwanted air infiltration around window/wall connections
- ❖ Adheres to a range of window and construction substrates

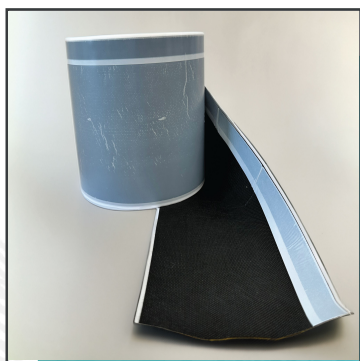




### Technical Details

Tensile Strength:	>5MPa (EN 12311-2)
Peel Adhesion:	12.5 N/cm
Driving Rain Tightness:	No Water 600 Pa (EN 1027)
Water Tightness:	No Leaks (EN 1928)
Air Tightness:	>600 Pa (EN 1026)
Sd Value:	>0.75m
Service Temperature:	-10°C to 80°C
Application Temperature:	5°C to 35°C

### Important Information

Complies with:

-  AS 2047 7.2.2 Flashing & 7.3.1 General
-  NCC 2022 H2F2 Weatherproofing & Dampness
-  NCC 2022 H2P2 Weatherproofing

Must be covered within 3 months of application to prevent UV damage

Forms part of Click IN Systems™ Window Installation Methodology

### Surface Preparation

Surfaces must be clean, dry and free of dust. In the case of friable, porous or fragile surfaces, it is advisable to stabilise them with a liquid primer.

#### Delivery Form

Code	Width	Length	kg/roll	Qty
CI530BK148/30/R	148mm	30m	1.70	1