


Click Brick forms half of the revolutionary Click IN fixing system for Window & Door Installation.

Designed to be mounted into Window Frames, reveals, or embedded in to openings, the Click IN fixing system allows rapid, repeatable and easy installation.

- ✦ Removes Traditional constraints associated with window installation
- ✦ No packers or shims required for most applications
- ✦ No fixings through internal finishes
- ✦ Levels adjustable post installation
- ✦ Commercial, Residential & Retrofit Windows can all utilise Click IN Mounting System
- ✦ Perfect for Modular Construction

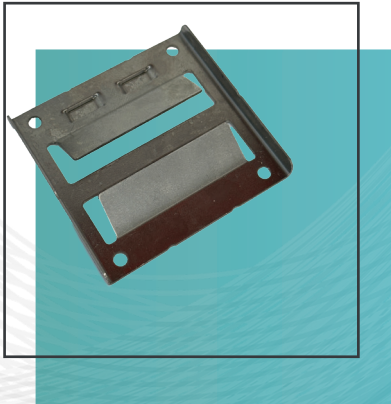

Technical Details

Material:	Stainless Springsteel (ISO 9445-1)
Thickness:	0.6mm
Surface:	2H
Tensile Strength Rm:	1404
Yield Point Rp 0.2:	1095
Elongation A80:	25.3

Important Information

- ✦ Must be used with Click In Screw to form Click IN fixing system
- ✦ Static Load 3.02kN per Click IN Fixing Set (EN 1628:2021)
- ✦ Click Brick requires four 3.5mm x 16mm screws to be mounted on to window frame, reveal or opening

Forms part of Click IN Systems™ Window Installation Methodology

Delivery Form

Code	Width	Units/Box	kg/box	Qty
CIKIT90	N/A	90 + 360 Mounting Screws	1.68	1